
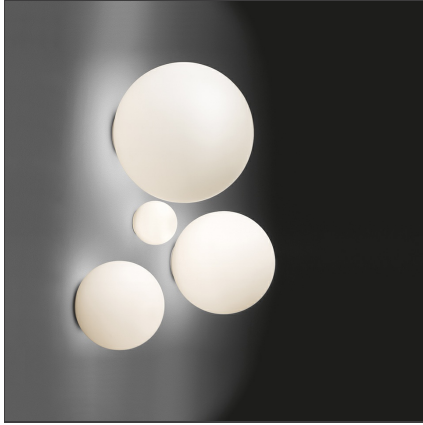



Dioscuri wall/ceiling 14 (G9)



IP65     

Dimmerable: +  -

TECHNICAL DRAWINGS

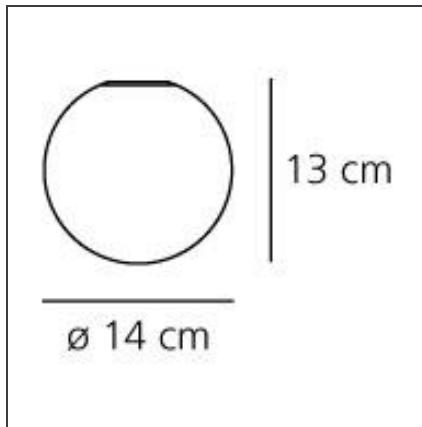

DESIGN BY

Michele De Lucchi

DESCRIPTION

Materials: Thermoplastic resin ceiling support; acid-etched blown glass diffuser. IP65 rating makes it suitable also for outdoor use.

FEATURES

| | | | |
|----------------------|---------------|-----------------------|--------------------------------|
| Article Code: | 1039010A | Material: | Blown glass, polycarbonate |
| Colour: | White | Series: | Design, Outdoor |
| Installation: | Wall, Ceiling | Area contract: | Hospitality, null, Residential |
| | | Emission: | Diffused |

DIMENSIONS

| | | | |
|----------------|-------|---------------------------|------|
| Height: | cm 13 | Impact Resistance: | N.D. |
| | | Glow Wire Test: | 850 |

NOT INCLUDED SOURCES

| | | | |
|------------------|------|---------------|---|
| Category: | HALO | Class: | A |
| Number: | 1 | | |
| Watt: | 48W | | |
| Socket: | G9 | | |

ALTERNATIVE SOURCES

| | |
|--------------------------------------|-------|
| Category: | LED |
| Number: | 1 |
| Watt: | 2,3W |
| Delivered lumens output (lm): | 200lm |
| Type: | 2 |
| Socket: | G9 |
| Class: | A |

LUMINAIRE

| | | | |
|-----------------|-----------|--------------------------------------|-------|
| Watt: | 48W | Delivered lumens output (lm): | 980lm |
| Voltage: | 220V-240V | CCT: | 2900K |

Notes

The IP 65 degree of protection makes it also suitable for outdoor application.