

Assolo parete|soffitto


4,5 ø 20
1 3/4" 7 7/8"



luminaire	
materials	aluminium
environment	interiors
mounting location	wall/ceiling
emission	indirect light
weight	0,8 kg
voltage	230V
ballast	integrated electronic dimmable
dimming	phase-cut
insulation class	1
IP classification	IP20
certifications	CE
design	Luta Bettonica, 2012

finish	
white cod 1520	black cod 1524
white also with round plate cod 1522	black also with round plate cod 1523
junction box plate white cod 1528	junction box plate black cod 1530
colour on demand monocolour	

light source	
source	LED
number of led	1
power	16W
luminous flux	1.600 lm
colour temperature	2.800K
CRI	≥ 80
energy label	

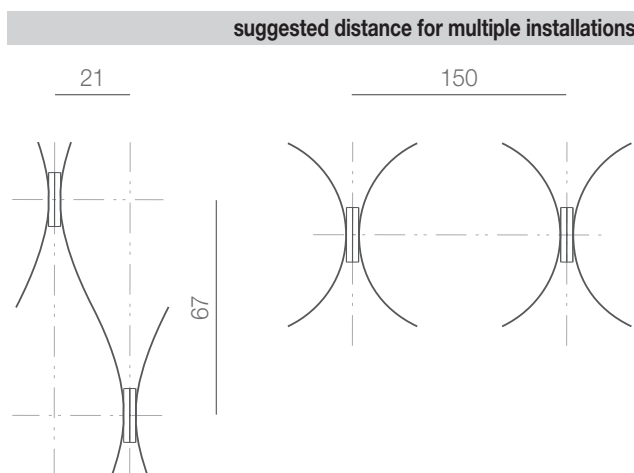

CINI & NILS