


# Panthella Table

Panthella Table - 5744167055

The fixture emits a glare-free, soft and comfortable illumination. The opal acrylic shade leaves a diffuse comfortable light atmosphere due to the translucent shade, the downward reflection from the inner shade and the reflection from the trumpet stem.

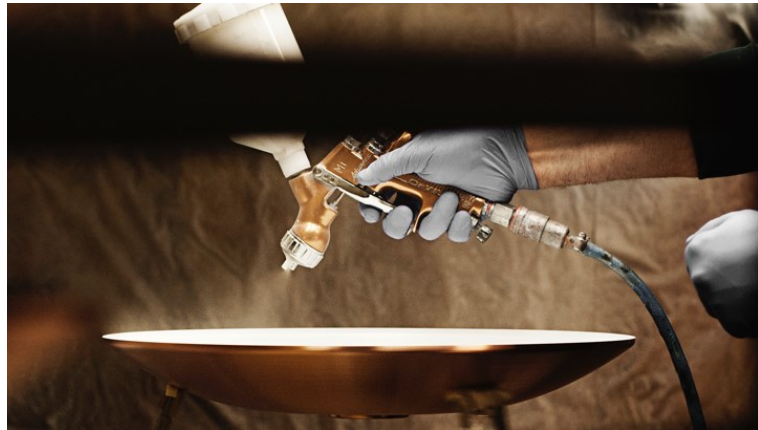

## Product info

### Mounting

Cable type: Plastic cord with plug. Cable length: 2.5m. Light control: On/off switch on cord. Diffuser with bajonet lock.

### Finish

White opal acrylic.

### Materials

Shade: Injection moulded white opal acrylic. Base: White, injection moulded ABS. Housing: White, injection moulded ABS. Stem: White, steel. Diffuser : Injection moulded opal pmma.

### Class


Ingress protection IP20. Electric shock protection II w/o ground.

### Specification notes

The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On [www.louispoulsen.com](http://www.louispoulsen.com) we update a list of recommendable light sources.

### Light source


1x28W E27

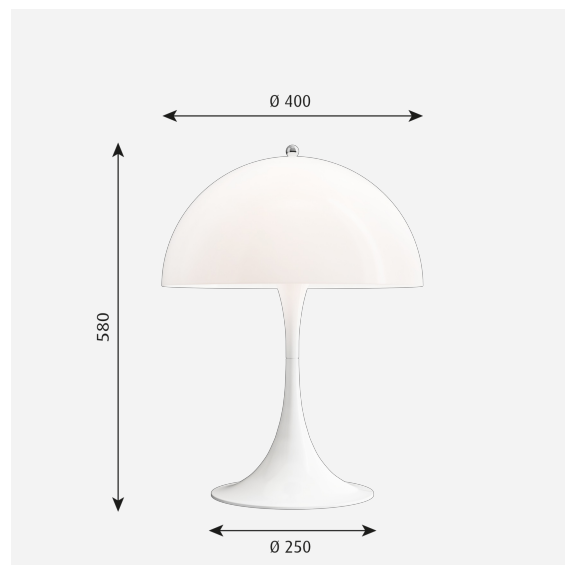


## Product family



Panthella Floor



Panthella MINI




Panthella Portable




Panthella Table 320

# Light distribution diagrams


## Cartesian

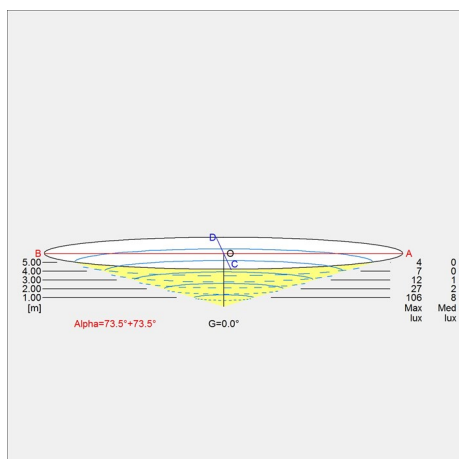

## Isolux

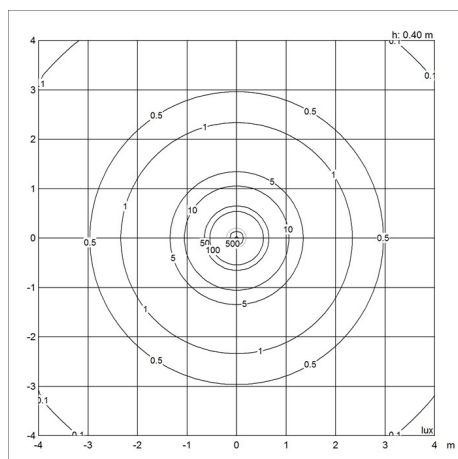

## Polar

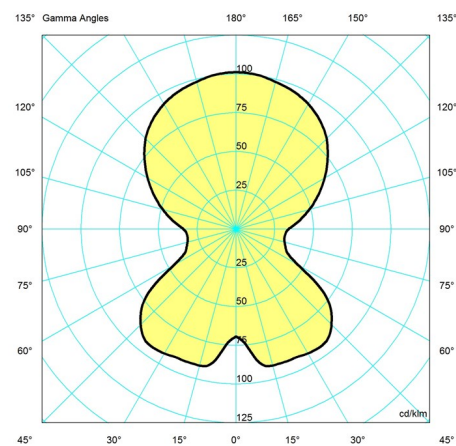

## Spare parts & accessories

### Product

Panthella Floor/Table top nut chrome  
Panthella Table shade holder clear  
Panthella table diffuser V2021  
Panthella table bajonetbase V2021  
Panthella table shade V2021

### Variant number

5744610049  
5744610544  
5744167479  
5744167482  
5744167505

## Data specifications

Colour	White opal acryl	Length	-
Width	-	Height	-
Built-in Height	-	IP class	20
Class	-	Net Weight	2.5
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	1x28W E27

**Panthea Table**

Kelvin	-
SDCM	-
Watt	-
Light control	-
UGR Transversal / Axial	<b>10.2/10.2</b>
Driver life	-

CRI	-
Lumen	-
Efficacy	-
Min. Dim Level (%)	-
L80B50 (hours)	-